



Professional Cooking Equipment

To provide tailored solutions.



It improves the quality and well-being of the working environment



GAS combustion system

GAS combustion system to ensure full combustion of gas



Electric heating system

Far infrared radiation heating, the most effective penetration of food goods.



Energy Saving

Environmental protection



Save Money

Low energy consumption, high efficiency



Incredibly easy to clean and hygienic

Cleaning time is greatly reduced



Gas Range with Burners



*Burner is made by precision forging

46669

- *High-quality anti-corrosion 304 stainless steel
- *Imported thermocouple, longer life than common type at least half a year





电电电电电电台:



GR9080B4	GR9012B6
90 Series	90 Series
4 Burner Gas Range With Oven	6 Burner Gas Range With Oven
$800 \times 900 \times 850 + 120 \text{mm}$	1200 x 900 x 850 + 120mm
22+5.4kw	38.8kw
5.4kw	5.4kw
$560 \times 400 \times 680 \text{mm}$	$568 \times 390 \times 700 \text{mm}$
6.5kw x 2+5.5kw x 2	6.5kw x 3+5.5kw x 3
2800Pa	2800Pa
2.0kg/h	2.788kg/h
2000Pa	2000Pa
2.95m3/h	4.106m3/h
	90 Series 4 Burner Gas Range With Oven 800 x 900 x 850 + 120mm 22+5.4kw 5.4kw 560 x 400 x 680mm 6.5kw x 2+5.5kw x 2 2800Pa 2.0kg/h 2000Pa

DABEN One Stop Hotel & Resorts Supply


Griddle






- * Each individual thermostat controls one-half of the cooking surface.
- * The series griddles feature "heat bank" technology-giving you significantly faster and more evenly distributed heat than typical gas fired griddle.



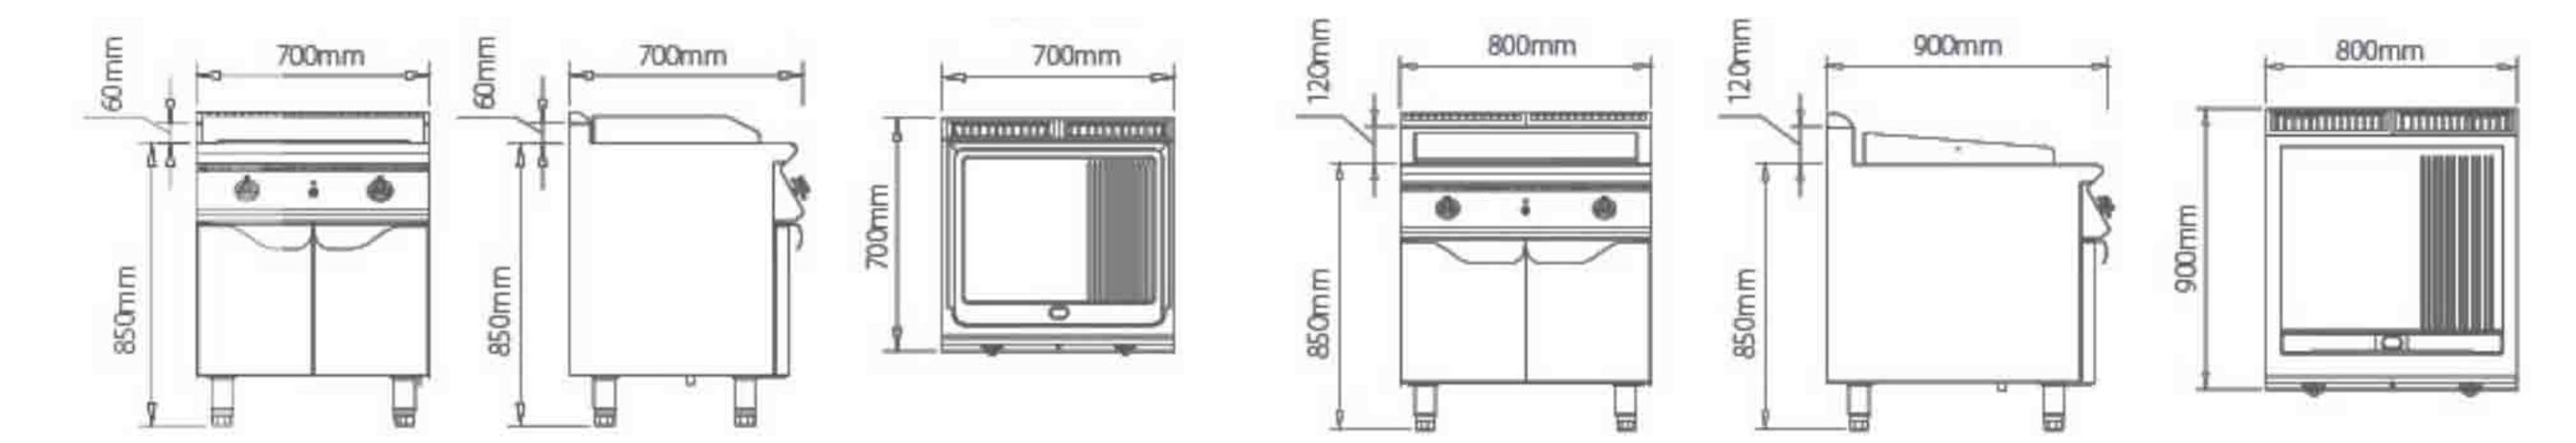

	GD7070G	GD9080G
	70 Series	90 Series
	Gas 2/3 Flat 1/3 Grooved Griddle with Cabinet	Gas 2/3 Flat 1/3 Grooved Griddle with Cabinet
Dimension	$700 \times 700 \times 850 + 60 \text{mm}$	800 x 900 x 850 + 120mm
Power	10kw	15kw
Voltage	/	
Griddle Size	$600 \times 460 \times 16 \text{mm}$	$700 \times 580 \times 16 \mathrm{mm}$
LPG Pressure	2800Pa	2800Pa
LPG Consumption	0.72kg/h	1.078kg/h
NG Pressure	2000Pa	2000Pa
NG Consumption	1.06m3/h	1.587m3/h



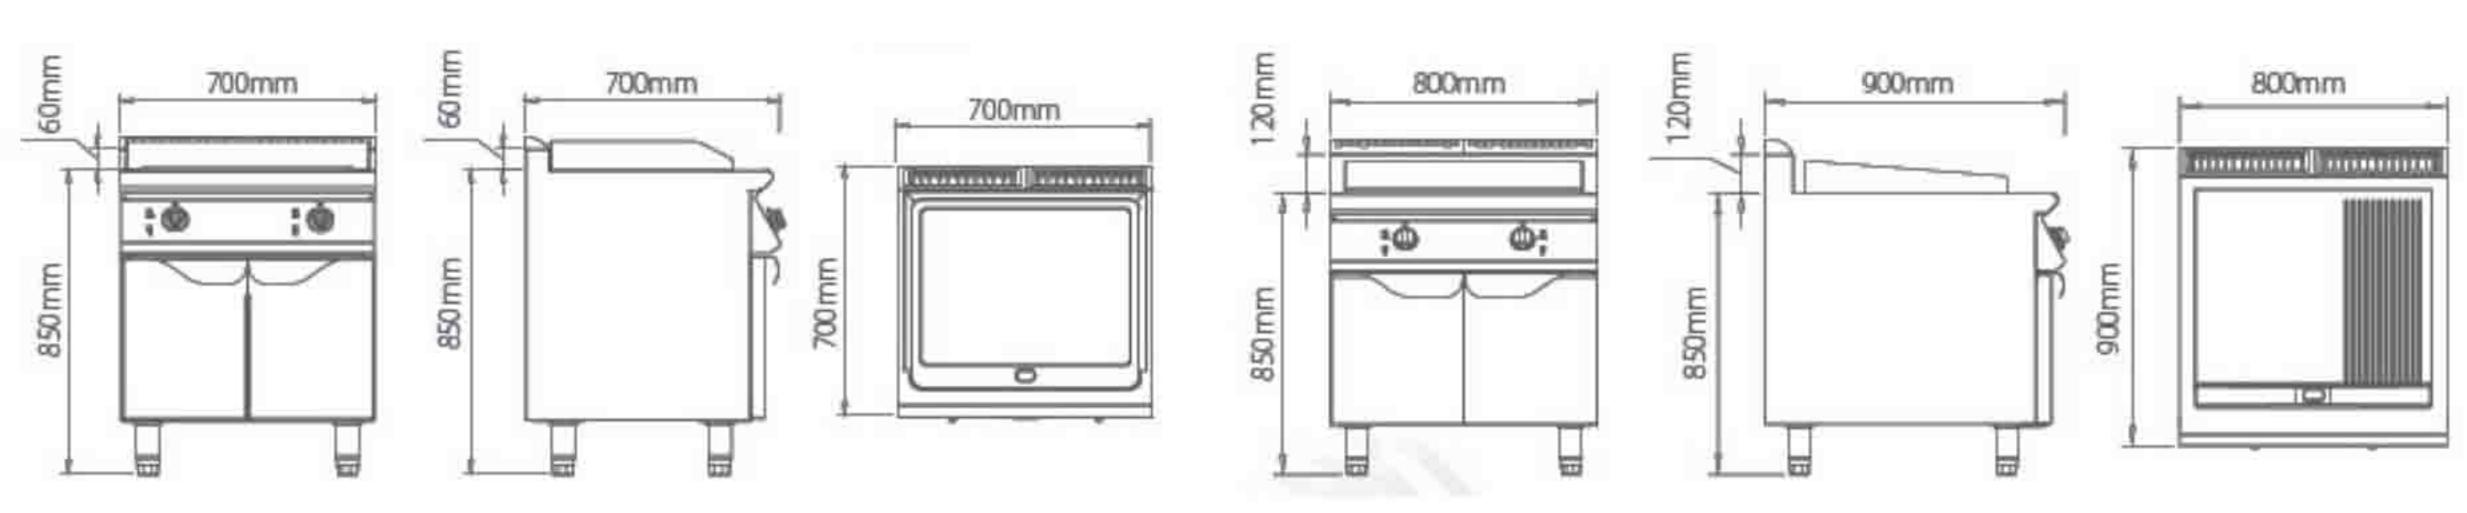

	GD7070E	GD9080E
	70 Series	90 Series
	Electric 2/3 Flat 1/3 Grooved	Electric 2/3 Flat 1/3 Grooved
	Griddle with Cabinet	Griddle with Cabinet
Dimension	$700 \times 700 \times 850 + 60 \text{mm}$	800 x 900 x 850 + 120mm
Power	9kw	12kw
Voltage	380v/50Hz	380v/50Hz
Griddle Size	600 x 460 x 16mm	700 x 580 x 16mm
LPG Pressure		
LPG Consumption		/
NG Pressure	/	/
NG Consumption		

Gas Grill

- *Selected high-quality stainless steel, anti-corrosion
- *Gas distribution by a safety valve with thermocouple.
- *Continuous heating regulation
















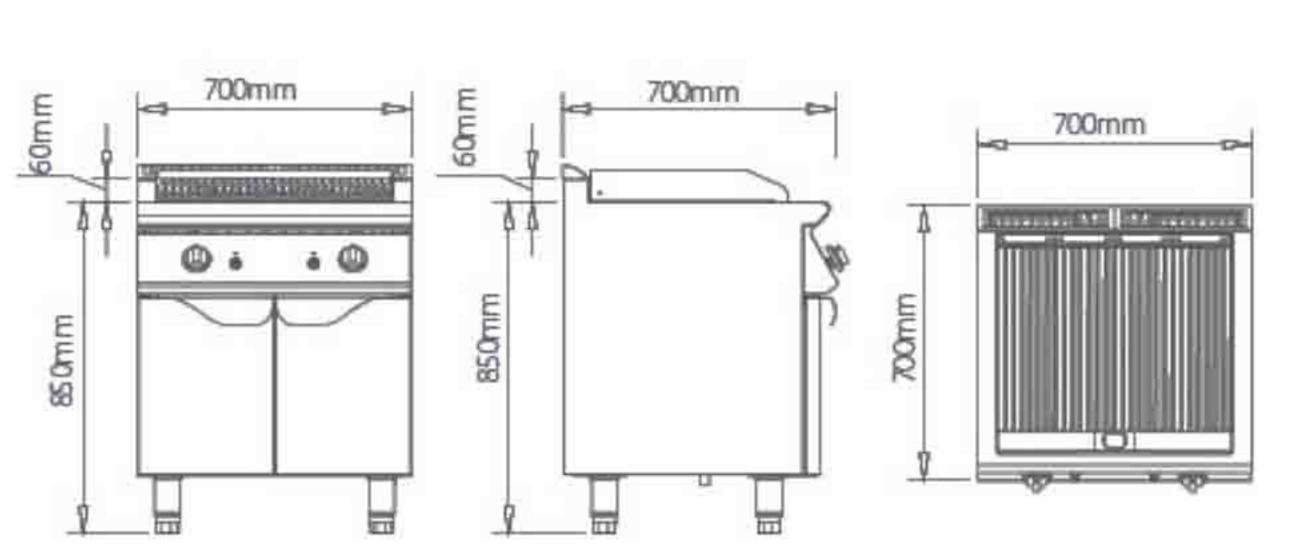

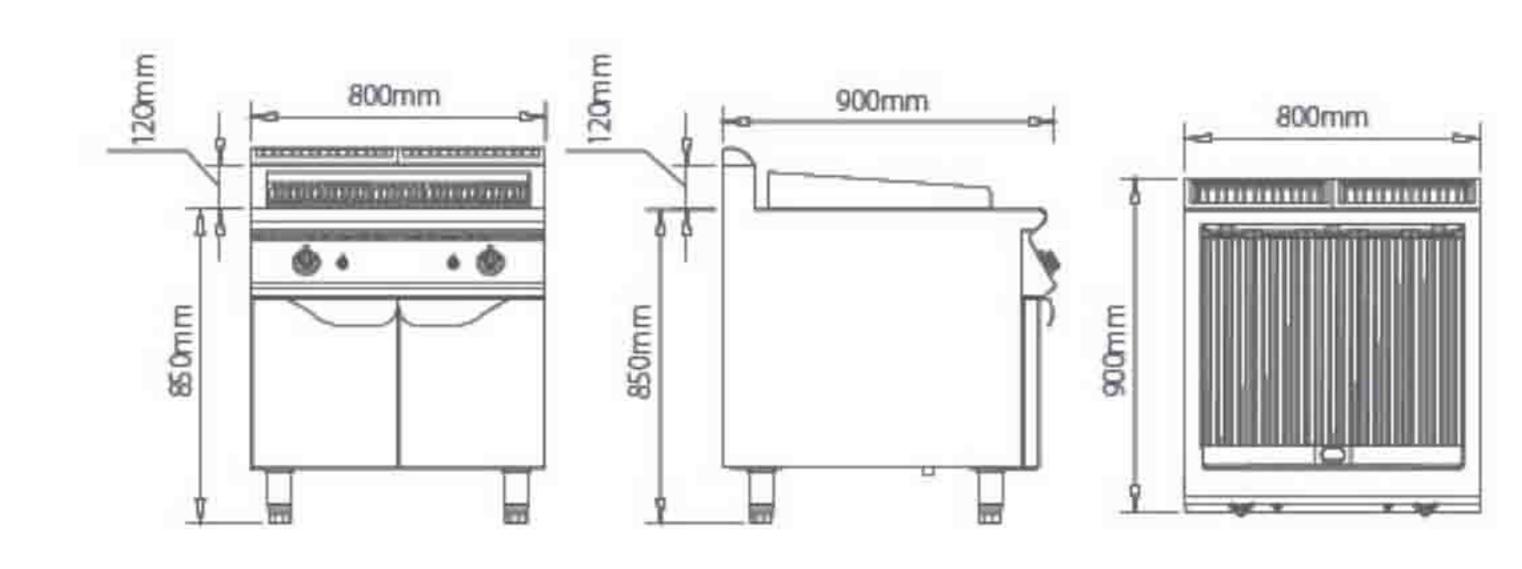

	GG7070G	GG9080G
	70 Series	90 Series
	Gas Lava Rock Frill with Cabinet	Gas Lava Rock Frill with Cabinet
Dimension	$700 \times 700 \times 850 + 60 \text{mm}$	800 x 900 x 850 + 120mm
Power	14kw	23kw
Net weight	106kg	144kg
Oven Inside Dimension	610 x 520mm	585 x (140x5)mm
Inlet Size	3/4"(φ25mm)	3/4"(\partial 25mm)
LPG Pressure	2800Pa	2800Pa
LPG Consumption	1.006kg/h	1.65kg/h
NG Pressure	2000Pa	2000Pa
NG Consumption	1.48m3/h	2.44m3/h

Gas / Electric Fryer

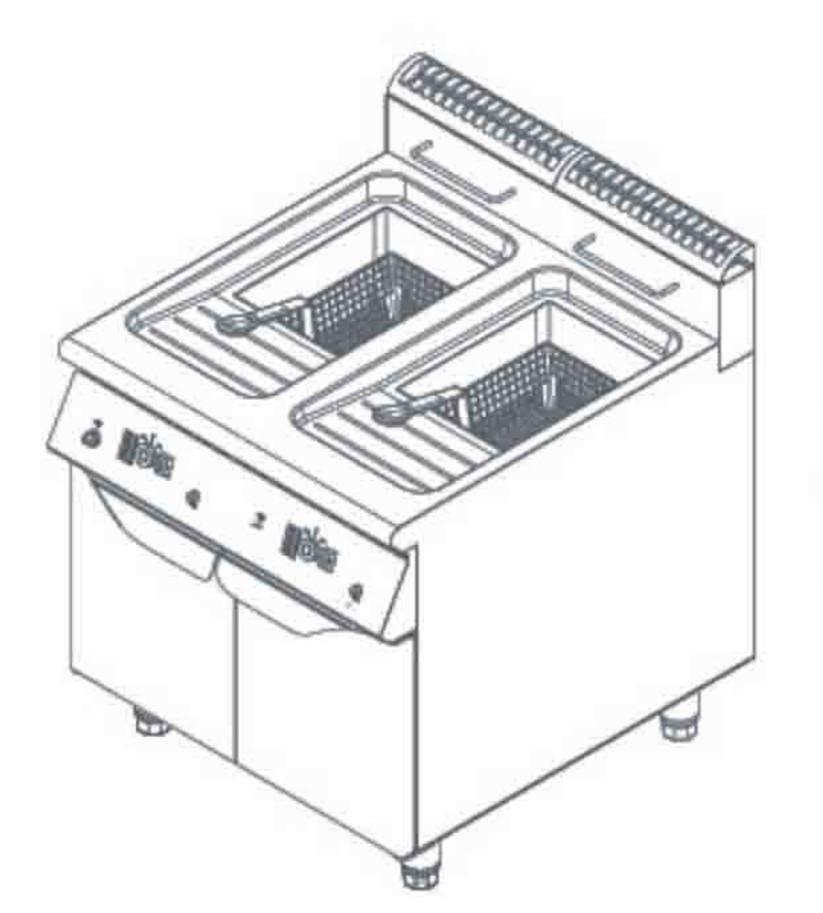

Safety operation

Built-in heat element. Safe operation with the cover and plastic coated heat resistant handles.















	GF7070G	GF9080G
	70 Series Gas 2-Tank 2-Basket Fryer with Cabinet	90 Series Gas 2-Tank Fryer with Cabinet
Dimension	$700 \times 700 \times 850 + 60 \text{mm}$	800 x 900 x 850 + 120mm
Power	23kw	31kw
Voltage	/	
Fry Basket Size	280 x 110 x 130mm	
Oil Tank Capacity	(14-16L)x 2	(17-20L)x 2
LPG Pressure	2800Pa	2800Pa
LPG Consumption	1.581kg/h	2.228kg/h
NG Pressure	2000Pa	2000Pa
NG Consumption	3.175m3/h	3.28m3/h
	EF7070E	EF9080E
	70 Series Electric 2-Tank 2-Basket Fryer	90 Series Electric 2-Tank 2-Basket Fryer
Dimension	70 Series Electric 2-Tank 2-Basket Fryer with Cabinet	90 Series Electric 2-Tank 2-Basket Fryer with Cabinet
Dimension Power	70 Series Electric 2-Tank 2-Basket Fryer	90 Series Electric 2-Tank 2-Basket Fryer
	70 Series Electric 2-Tank 2-Basket Fryer with Cabinet 700 x 700 x 850 + 60mm	90 Series Electric 2-Tank 2-Basket Fryer with Cabinet 800 x 900 x 850 + 120mm
Power	70 Series Electric 2-Tank 2-Basket Fryer with Cabinet 700 x 700 x 850 + 60mm 24kw	90 Series Electric 2-Tank 2-Basket Fryer with Cabinet 800 x 900 x 850 + 120mm 24kw
Power Voltage	70 Series Electric 2-Tank 2-Basket Fryer with Cabinet 700 x 700 x 850 + 60mm 24kw 380V/50Hz	90 Series Electric 2-Tank 2-Basket Fryer with Cabinet 800 x 900 x 850 + 120mm 24kw 380V/50Hz
Power Voltage Fry Basket Size	70 Series Electric 2-Tank 2-Basket Fryer with Cabinet 700 x 700 x 850 + 60mm 24kw 380V/50Hz 280 x 110 x 130mm	90 Series Electric 2-Tank 2-Basket Fryer with Cabinet 800 x 900 x 850 + 120mm 24kw 380V/50Hz 310 x 130 x 130mm
Power Voltage Fry Basket Size Oil Tank Capacity LPG Pressure	70 Series Electric 2-Tank 2-Basket Fryer with Cabinet 700 x 700 x 850 + 60mm 24kw 380V/50Hz 280 x 110 x 130mm	90 Series Electric 2-Tank 2-Basket Fryer with Cabinet 800 x 900 x 850 + 120mm 24kw 380V/50Hz 310 x 130 x 130mm
Power Voltage Fry Basket Size Oil Tank Capacity	70 Series Electric 2-Tank 2-Basket Fryer with Cabinet 700 x 700 x 850 + 60mm 24kw 380V/50Hz 280 x 110 x 130mm	90 Series Electric 2-Tank 2-Basket Fryer with Cabinet 800 x 900 x 850 + 120mm 24kw 380V/50Hz 310 x 130 x 130mm
Power Voltage Fry Basket Size Oil Tank Capacity LPG Pressure LPG Consumption	70 Series Electric 2-Tank 2-Basket Fryer with Cabinet 700 x 700 x 850 + 60mm 24kw 380V/50Hz 280 x 110 x 130mm	90 Series Electric 2-Tank 2-Basket Fryer with Cabinet 800 x 900 x 850 + 120mm 24kw 380V/50Hz 310 x 130 x 130mm




Gas/Electric Pasta Cooker


High efficiency heating element

The classic mechanical pasta cooker with high performance heating element, speed cooking.





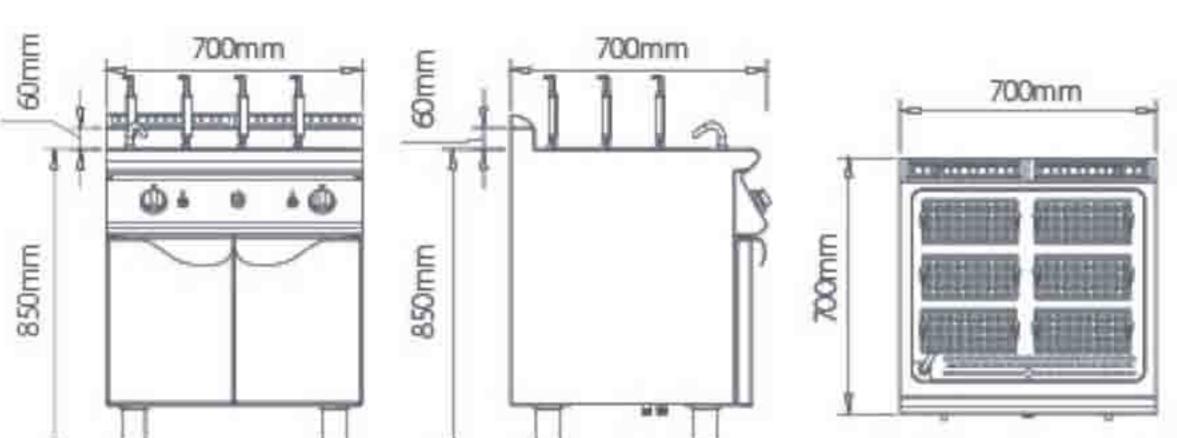

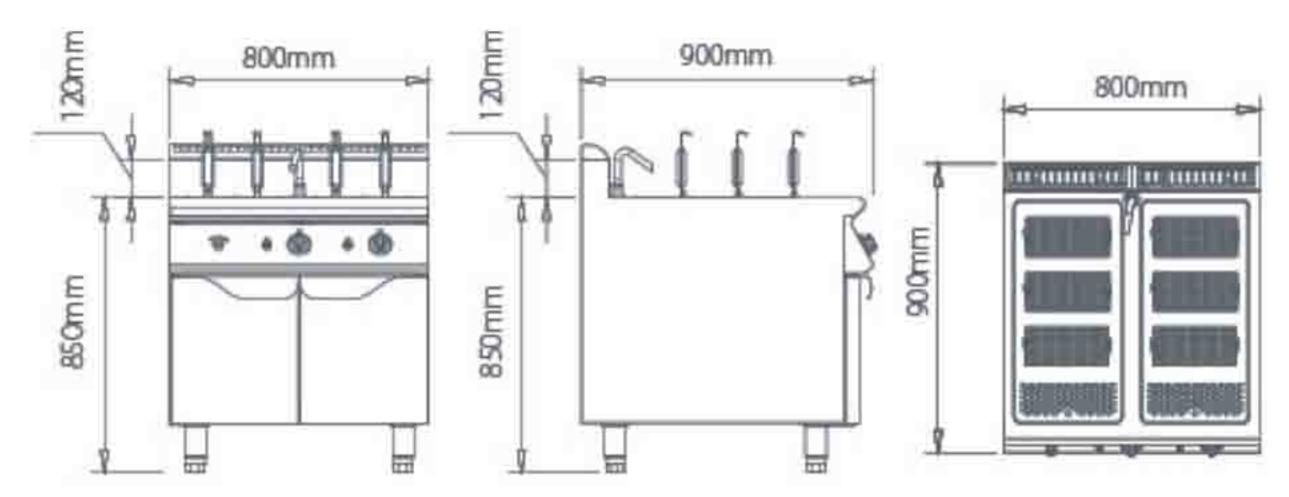

	PC7070G	PC9080G
	70 Series	90 Series
	Gas Pasta Cooker with Cabinet	Gas Pasta Cooker with Cabinet
Dimension	$700 \times 700 \times 850 + 60 \text{mm}$	800 x 900 x 850 + 120mm
Power	13kw	15kw
Voltage	/	1
Inlet Size	3/4"(Φ25mm)	3/4"(Φ25mm)
Basket Size	130 x 260 x 120mm*6pcs	130 x 260 x 120mm*6pcs
LPG Pressure	2800Pa	2800Pa
LPG Consumption	0.934kg/h	1.078kg/h
NG Pressure	2000Pa	2000Pa
NG Consumption	1.376m3/h	1.587m3/h



	PC7070E	PC9080E
	70 Series	90 Series
	Electric Pasta Cooker with Cabinet	Electric Pasta Cooker with Cabinet
Dimension	$700 \times 700 \times 850 + 60 \text{mm}$	800 x 900 x 850 + 120mm
Power	12kw	18kw
Voltage	380V/50Hz	380V/50Hz
Inlet Size	3/4"(Φ25mm)	3/4"(Φ25mm)
Basket Size	130 x 260 x 120mm*6pcs	130 x 260 x 120mm*6pcs
LPG Pressure		1
LPG Consumption		
NG Pressure	/	1
NG Consumption	/	
LPG Consumption NG Pressure		/ / / / / / / / / / / / / / / / / / /



Hot Plate Cooker

- *Round plate, individual control.
- *Large heating surface; free pot sliding without tilting.
- *Excellent heat accumulation means exploitation of remaining heat and sturdy heat supply.
- *Energy saving mode by temperature limit switch.











	HPC7070E	HPC9080E
	70 Series	90 Series
	Electric 4-Hot Plate Cooker with	Electric 4-Hot Plate Cooker with
	Oven	Oven
Dimension	$700 \times 700 \times 850 + 60 \text{mm}$	$800 \times 900 \times 850 + 120 \text{mm}$
Power	14kw	20.8kw
Voltage	380V/50Hz	380V/50Hz
Electric Potential Range	1-3 Degree	1-6 Degree
Oven Inside Dimension	$530 \times 560 \times 260 \text{mm}$	$530 \times 630 \times 260 \text{mm}$
Oven Power	4.8kw	4.8kw



Heated Holding Cabinet

- *Built-in insulated control panel and thermometer.
- *Ventilated heating unit consisting of an AISI 304 stainless steel sheet casing containing a powered fan and heating element.
- *Upright style contains one-door and and double-door, capacity up to 11 layers and 22 layers.













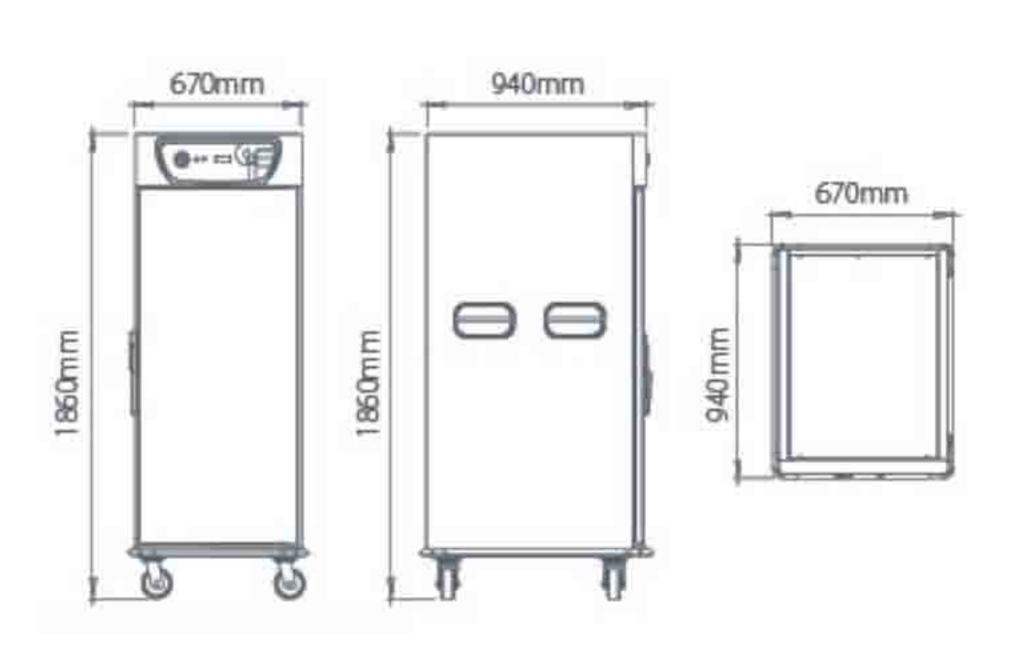

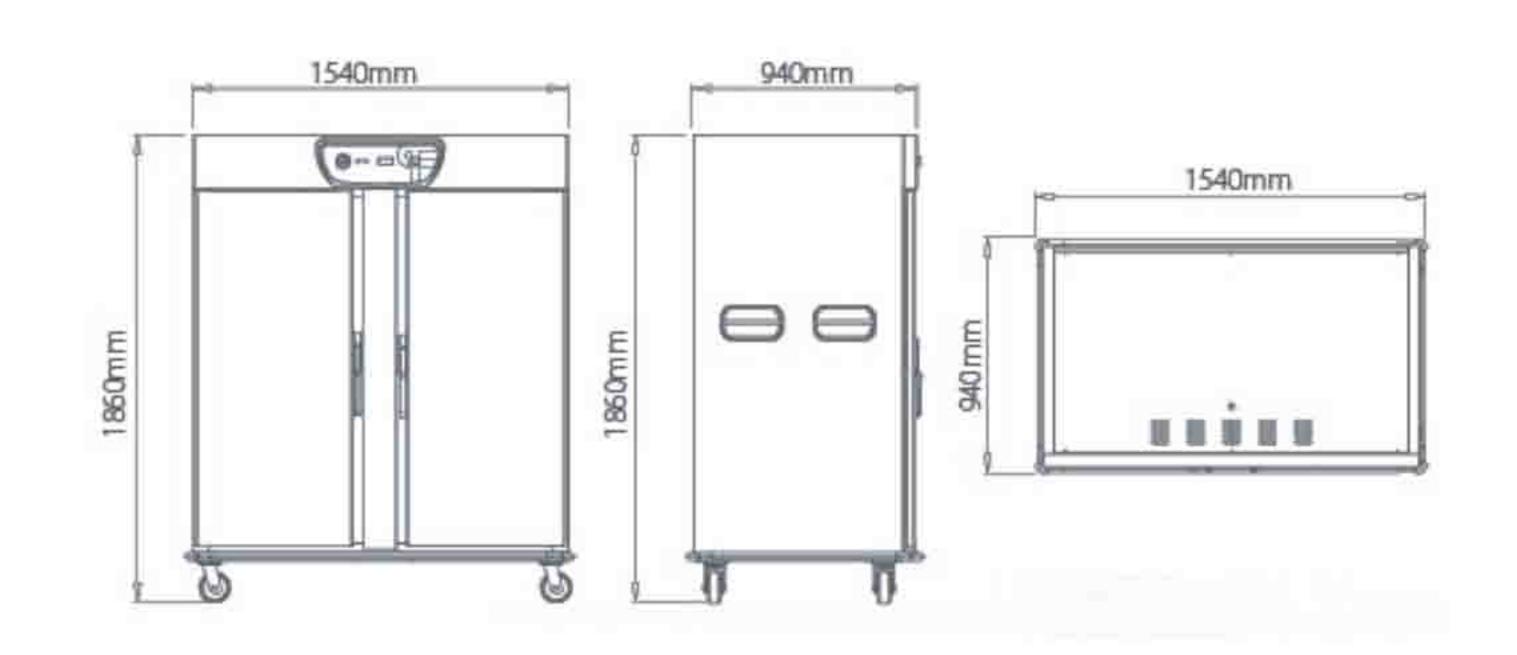

	HHC1D	HHC2D
	Upright Heated holding Cabinet	Upright Heated holding Cabinet
	1 Door	2 Door
Dimension	670 x 940 x 1860mm	1540 x 940 x 1860mm
Power	2.52kw	2.52kw
Voltage	220-240V/50Hz	220-240V/50Hz
Grid Size	636 x 530mm	636 x 530mm
Capacity	11 layers	22 layers

